
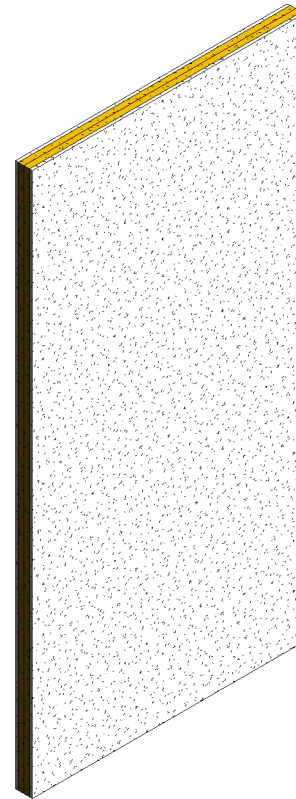


Area Separation/DensArmor Plus® Fireguard C®

Two layers 1" (25.4 mm) **DensGlass® Shaftliner** inserted in H-Studs 24" (610 mm) o.c. Metal covered using 6" (152 mm) wide 1/2" (12.7 mm) **DensArmor Plus® Fireguard C®** interior panels or 1/2" (12.7 mm) **ToughRock® Fireguard C®** gypsum board.

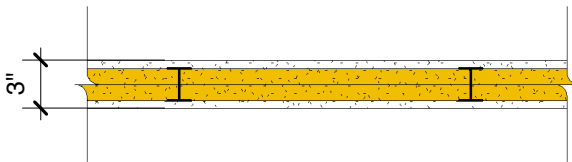


Georgia-Pacific
 Gypsum
 Website: www.gpgypsum.com

**Georgia-Pacific
 Gypsum**
 133 Peachtree St.
 Atlanta, Georgia 30303
 PH: 1-(800)-225-6119

Area Separation / DensArmor Plus®
Fireguard C®

Assembly:	WHI 495-0473	WHI 495-0473
Date:	December 2012	
Drawn by:	JAT	Fire Rating: 2 Hr
Checked by:	RSS	