


OVER SIZED HOLE  
IN BASIC PARTITION

TYPE S SCREWS  
MIN. 2 PER SECTION

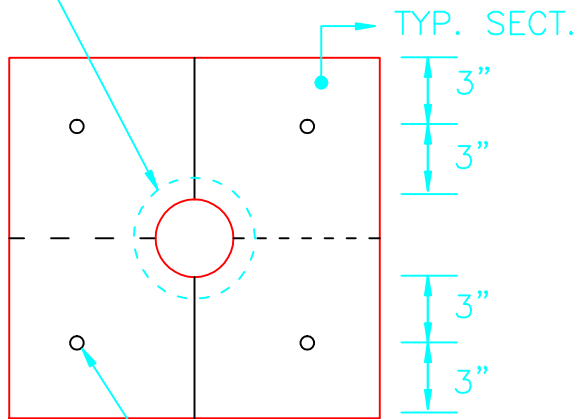

HOLES OVER 3" DIA.

JOINT COMP.

TYPICAL SECTION

TYPE G SCREWS  
BASE LAYER JOINT  
HOLES UP TO 3" DIA.

NOTES: BUTTER BACK SIDE OF PATCH  
WITH JOINT COMPOUND OR  
GYPSUM FIRE HALT SEALANT

LEAVE ALL SCREWS EXPOSED

### BLOW-OUT PATCH AT PENETRATIONS

GEORGIA-PACIFIC GYPSUM, LLC IS PROVIDING THIS DETAIL AS A SERVICE TO OUR CUSTOMERS. PLEASE OBTAIN APPROVAL FROM THE PROJECT'S ARCHITECT, ENGINEER OR OTHER DESIGN AUTHORITY AND REVIEW WITH LOCAL BUILDING CODE OFFICIALS BEFORE YOU IMPLEMENT THIS DETAIL.

TECHNICAL SERVICES:  
800-225-6119

WEBSITE:  
[www.gp.com/gypsum](http://www.gp.com/gypsum)

**Georgia-Pacific Gypsum**

**SKETCH NO. 21**